


7X300W Blinder Light


User Manual

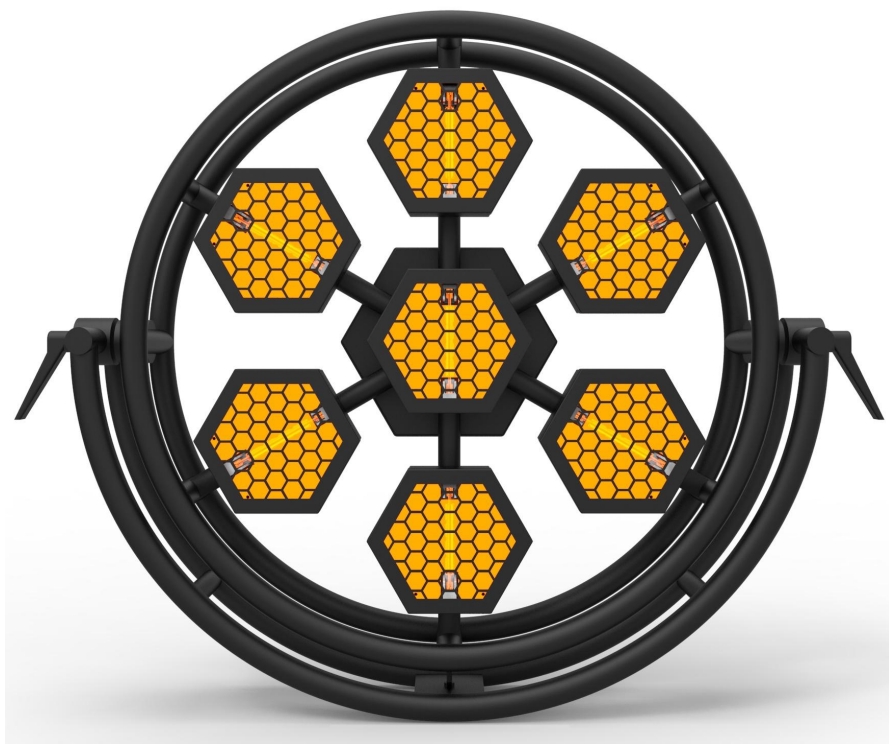


Catalogue

1. Function Menu	3
2. Functional Operation	4
3. Channel List	5-7
4. Diagram For Pixel Controlled	8
5. Product Dimensions	9
6. Technical Specifications	10

Function Menu

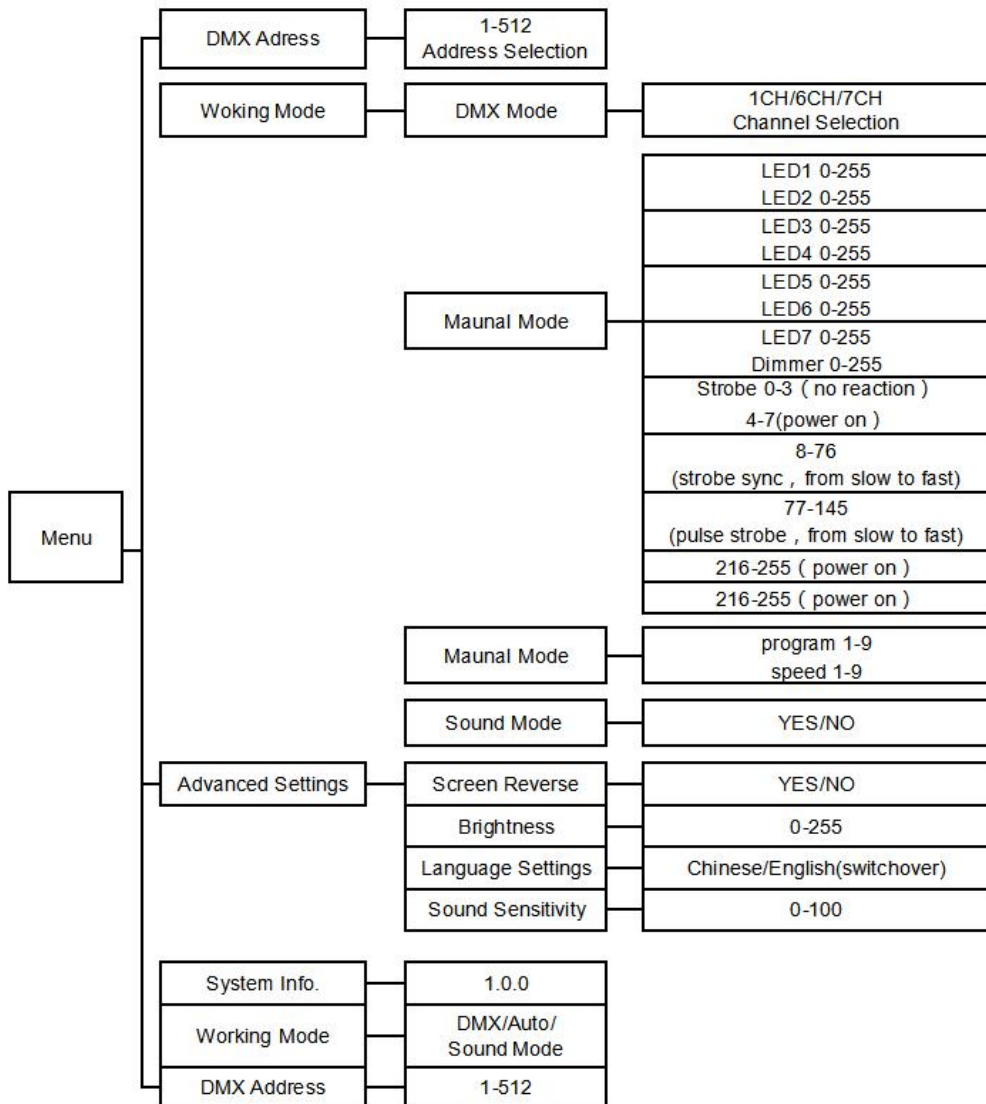

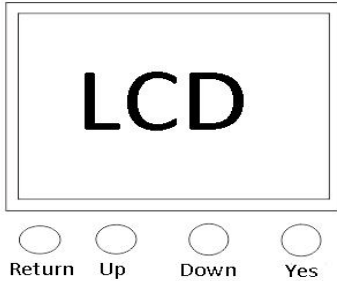

2.1 Built-in program in Auto-run mode

- 1、 Select working mode
- 2、 Select auto-run mode
- 3、 Select any program among 9 programs
- 4、 Set up the speed of the program

2.2 Manual Mode

The manual mode function is consistent with the Pixel control 7CH channel but in manual mode DMX address is not working in that condition . The seven submenus correspond to seven functions

2.3 Sound control Mode

- 1、 Select working mode
- 2、 Select auto mode, in order to activate the sound control mode, you need to select the programs first. Because the sound control mode will be changed according to the program.
- 3、 Select any program among 9 programs
- 4、 Select working mode again
- 5、 Select sound control mode
- 6、 Set up the sensitivity of the sound, select 16-255 because 0-15 doesn't work

Channel List

1CH DMX Function

- 1、 Select working mode
- 2、 Select DMX mode
- 3、 Set up as 1 channel mode
- 4、 exit the working mode, select DMX menu, set up the DMX menu address
DMX address can be set up as 001

channel	Name	from	to	Function description
1	Master dimmer	0		
		1	255	From dark to bright

6CH DMX Function

- 1、 Select working mode
- 2、 Select DMX mode
- 3、 Set up as 1 channel mode
- 4、 Exit the working mode, select DMX menu, set up the DMX menu address
DMX address can be set up as 001

Channel	Function	DMX	Action
1	Master Dimmer	0-255	Spot,from dark to bright
2	Strobe	0-3	Power off
		4-7	Power on
		8-76	strobe sync, from slow to fast
		77-145	pulse strobe, from slow to fast
		146-215	Random strobe, from slow to fast
		216-255	Power on
3	Built-in program 1	0-15	None
		16-31	Program1
		32-47	Program 2
		48-63	Program3
		64-79	Program4


		80-95	Program5
		96-111	Program6
		112-127	Program7
		128-143	Program8
		144-159	Program9
		160-175	Program10
		176-191	Program11
		192-207	Program12
		208-223	Program13
		224-239	Program14
		240-255	Program15
4	Built-in program 2	0-15	None
		16-31	Program16
		32-47	Program17
		48-63	Program18
		64-79	Program19
		80-95	Program20
		96-111	Program 21
		112-127	Program 22
		128-143	Program 23
		144-159	Program 24
		160-175	Program 25
		176-191	Program 26
		192-207	Program 27
		208-223	Program 28
224-239	Program 29		
240-255	Program 30		
5	Built-in program speed	0-255	Speed of Built-in program From slow to fast
6	Sound Sensitivity	0-15	None
		15-255	Sensitivity gradually increased

7CH Pixel controlled function


- 1、 Select working mode
- 2、 Select DMX mode
- 3、 Set up as 7 channel mode
- 4、 Exit the working mode, select DMX menu, set up the DMX menu address
DMX address can be set up as 001

channel	name	from	to	Function description
1	LED1	0		
		1	255	Dimmer from dark to bright
2	LED2	0		
		1	255	Dimmer from dark to bright
3	LED3	0		
		1	255	Dimmer from dark to bright
4	LED4	0		
		1	255	Dimmer from dark to bright
5	LED5	0		
		1	255	Dimmer from dark to bright
6	LED6	0		
		1	255	Dimmer from dark to bright
7	LED7	0		
		1	255	Dimmer from dark to bright

Diagram For Pixel Controlled

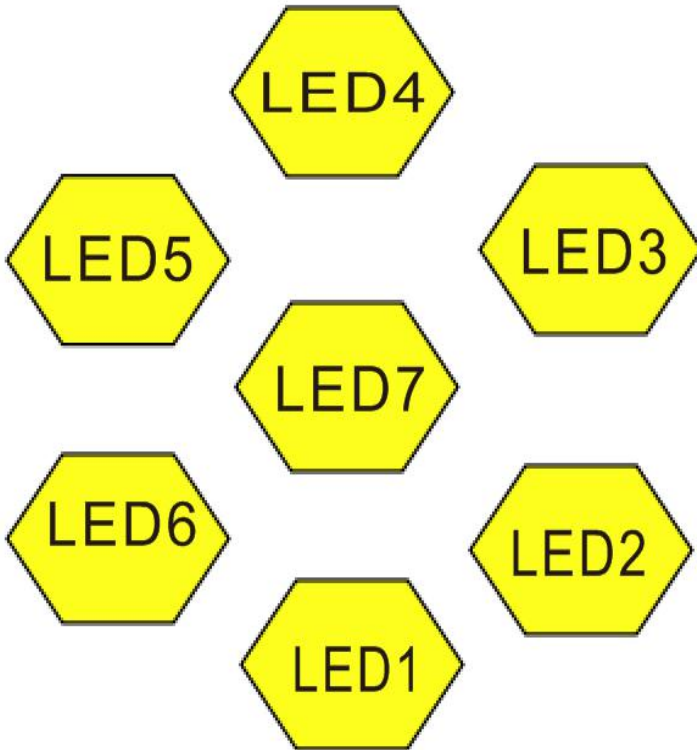

Product Dimensions

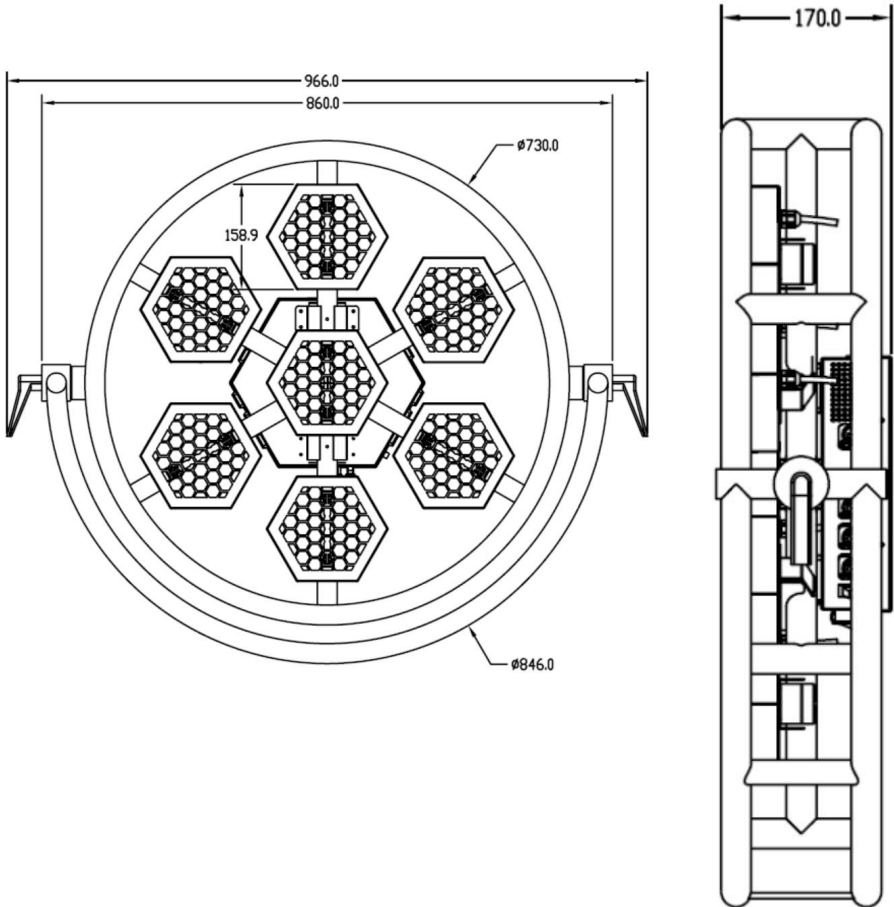

Technical Specifications

Voltage:	230V50/60HZ
Power consumption:	2100W
Lamp:	7X300W Halogen lamp
DMX Channel:	DMX512,1/6 Ch, Pixel controlled 7CH
Mode	Auto,Sound,DMX mode
Color temperature	2900K
Size	860x966x170mm
Weight	12.5Kg
Packing	Carton (1 pcs) /road case (2 pcs)