


LED Par Light

1. Graphic section:

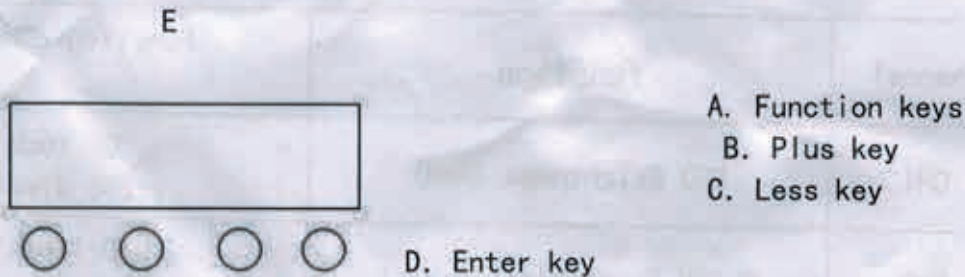

Digital display window

A B C D

Instructions: Press the function key A will cycle out of 12 kinds of different functional effects, digital tube in which the first two digits represent the current function (see menu). After two figures represent the kinds of functions are located. Address code. Or speed parameters. Press B or C key to modify its parameter values. Press the D key to confirm.

3. Digital display window function table : (all functions selected and then press the D key to confirm)

| | | |
|---|------|---|
| 1 | d001 | 5channel B.C key to add and subtract address code number (001-511) |
| 2 | A001 | 9 channel B.C key to add and subtract address code number (001-511) |
| 3 | CC01 | Jump change function B.C key to add and subtract address code number (001-511) |
| 4 | CP01 | Gradient function B.C key to add and subtract address code number (001-511) |
| 5 | dE01 | Variable pulse function B.C key to add and subtract address code number (001-511) |
| 6 | dENo | Jump change+Gradient function+ Variable pulse function |
| 7 | bEbE | Sound control jump change+Gradient+ Variablepulse |
| 8 | r255 | RED color for dimming |

| | | |
|----|------|-------------------------|
| 9 | G255 | Green color for dimming |
| 10 | b255 | bule color for dimming |
| 11 | W255 | White color for dimming |

4. DMX4 channel function (.4CH) :

| channel | function | Function control |
|---------|--------------------------|--------------------------|
| CH1 | RED Brightness (Red) | 0: lock 1-255 dimming |
| CH2 | GREEN Brightness (green) | 0: lock 1-255 dimming |
| CH3 | BLUE Brightness (bule) | 0: lock 1-255 dimming |
| CH4 | WHITE Brightness (white) | 0: lock 1-255 dimming |

5. DMX8 channel function (.8CH) :

| channel | Function | Function control |
|---------|--------------------------|--|
| CH1 | Total dimming (RGBW) | 0: lock 1-255 dimming |
| CH2 | RED Brightness (Red) | 0: lock 1-255 dimming |
| CH3 | GREEN Brightness (green) | 0: lock 1-255 dimming |
| CH4 | BLUE Brightness (bule) | 0: lock 1-255 dimming |
| CH5 | WHITE Brightness (white) | 0: lock 1-255 dimming |
| CH6 | Strobe effect | 0-9: Close 10-255 from slow to fast |
| CH7 | Self-propelled function | 10-50 jump change 51-100 gradient 101-150 Variable pulse |